


POCKET CONSOLE

JAS-PC-8

DMX CONSOLE

8 FADER

- hand-held console used to program scenes and colors for the JAS-P10A and P control (see page 4), the JAS-RRA (see page 5) or as a stand alone controller
- levels are set using 8 faders, each with an associated flash button
- each fader can be assigned to 512 unique addresses using the LED display
- flash buttons have two settings: "normal" takes associated fader to 100% light output "patch" patches the DMX dimmer address shown on the LED display to the associated fader
- powered via the integral 9V battery or 120V AC/DC adapter providing 9V DC 200mA output (supplied)

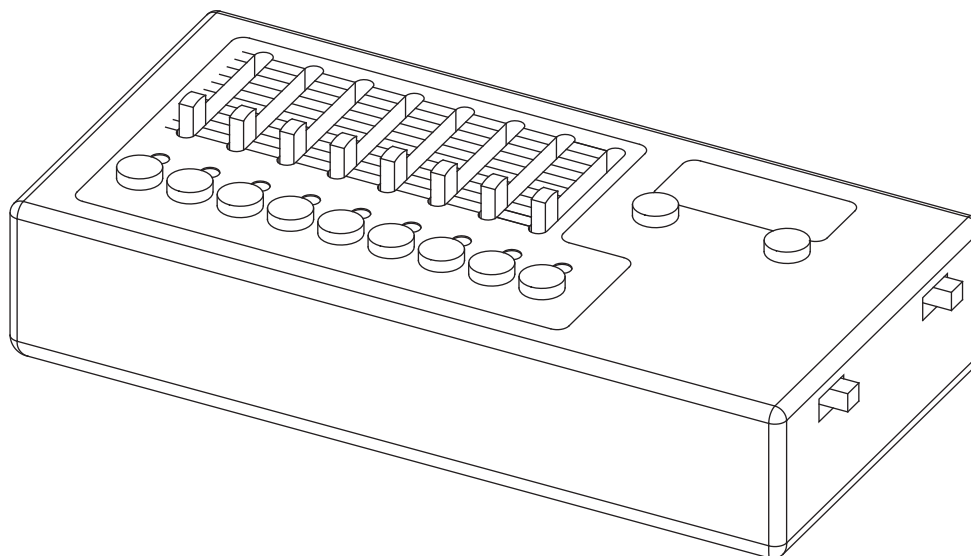

Uses

Used to program specific colors into JAS-P10A, JAS-P10P, and JAS-RRA
 Can be used on its own to find exact required colors

Specifications

Approximate dimensions are 6 3/4" x 3 1/4" x 1 3/8"
 Approximate weight is 14 ounces with battery
 Comes with cable & connector

Job Information

Type

Job Name

Location

JAS

Family
JAS

PC-8

Model
PC-8

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

