



SPECIALTY

NDD


NARROW DISTRIB. DIRECT DOWNLIGHT

LONG TWIN-TUBE, T8, T5 or T5HO


- 20 gauge steel construction, also available in aluminum, add "AL" in "Options" space
- features a parabolic "egg crate" louver to help achieve a very narrow distribution of light
- T8, T5, T5HO or Long Twin-Tube fluorescent lamp versions
- standard ballasts are integral electronic, consult Options p5 for available types of dimming and emergency ballasts
- fixtures are available in nominal lengths of 2, 3, 4, 5 and 8 feet
- Standard finish is High Reflectivity White powder coat done post production, decorative Large Pattern Galvanize and other custom colors and finishes are also available
- UL and C-UL Listed for Dry and Damp Locations

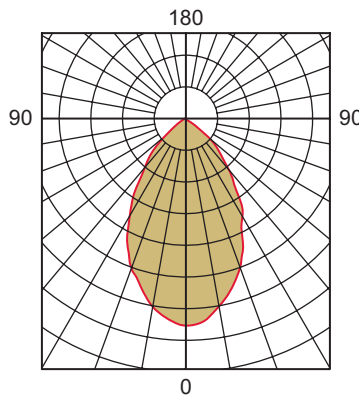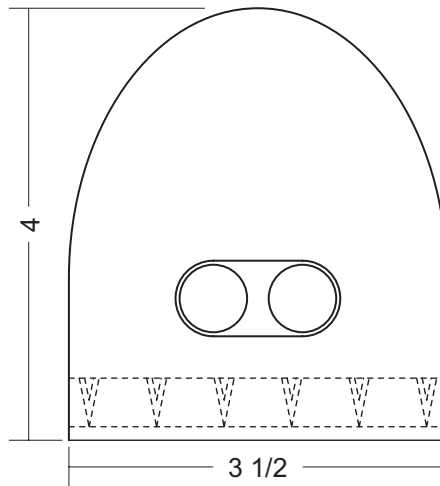

For a complete photometric report and IES file go to www.BirchwoodLighting.com or contact the factory

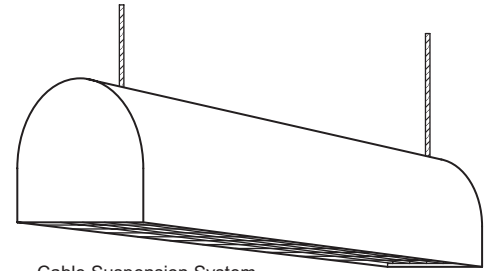

Cable Suspension System
option: **CSS**
See Options-p1 for details

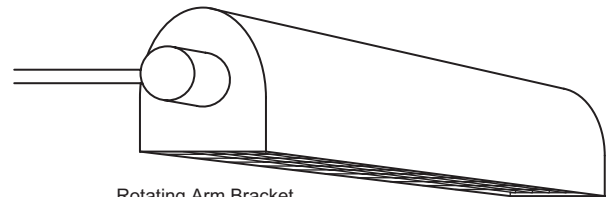

Rotating Arm Bracket
option: **RAB**
See Options-p2 for details

Job Information
Type _____
Job Name _____
Location _____

NDD

Model NDD

Lamp Type
CT - Long Twin-Tube
T8 - T8
T5 - Standard T5
T5HO - T5 High Output
when specifying CT specify 40, 50 or 55 watt lamps.

Voltage
120
277
347

Ballast
EB - electronic
DIM__ - dimming*
EM__ - emergency*
*refer to Options p5 for DIM__ and EM__ options code

Nominal Length
2'
3'
4'
5'
8'
R_ - run length runs are made up of 8' nominal fixtures unless otherwise specified

Options

Finish
HRW - High Reflectivity White
LPG - Large Pattern Galvanize
CU - Custom (please specify)

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

