




MINIMUM RADIUS INFORMATION "SM" Side Mount Models



LAMP UP or DOWN



**LAMP INSIDE
THE RADIUS**

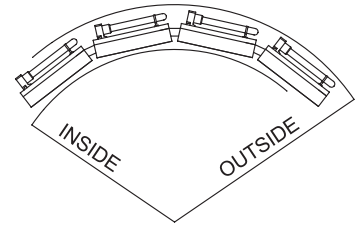

**LAMP OUTSIDE
THE RADIUS**

"SM" MODELS	UNIT LENGTH	LAMP UP or DOWN		LAMP INSIDE		LAMP OUTSIDE	
		INSIDE	OUTSIDE	INSIDE	OUTSIDE	INSIDE	OUTSIDE
SYD-9T-SM	8"	12"	16"	15"	19"	12"	16"
SYD-13T-SM	8"	12"	16"	15"	19"	12"	16"
SYD-18Q-SM	8"	12"	16"	15"	19"	12"	16"
SYD-18T-SM	11"	16"	20"	19"	23"	16"	20"
SYD-24T-SM	13 1/2"	20"	24"	24"	28"	19"	23"
SYD-26Q-SM	8"	12"	16"	15"	19"	12"	16"
SYD-39T-SM	17"	24"	28"	31"	35"	21"	25"
SYD-40T-SM	23"	31"	36"	37"	42"	30"	35"
SYD-50T-SM	23"	31"	36"	37"	42"	30"	35"
SYD-55T-SM	21 1/2"	29"	34"	36"	41"	29"	34"
SYD-80T-SM	23"	31"	36"	37"	42"	30"	35"

LAMP INFORMATION

"SM" MODELS	LAMP TYPE (NEMA)	INITIAL LUMENS PER LAMP	LUMENS PER FOOT	AVERAGE RATED LIFE
SYD-9T-SM	CFT9W/G23	580	870	10,000 hrs.
SYD-13T-SM	CFT13W/GX23	800	1,200	10,000 hrs.
SYD-18Q-SM	CFQ18W/G24q	1,250	1,875	10,000 hrs.
SYD-18T-SM	FT18W/2G11/RS	1,250	1,250	20,000 hrs.
SYD-24T-SM	FT24W/2G11	1,800	1,620	12,000 hrs.
SYD-26Q-SM	CFQ26W/G24q	1,800	2,700	10,000 hrs.
SYD-39T-SM	FT36W/2G11	2,900	2,030	12,000 hrs.
SYD-40T-SM	FT40W/2G11/RS	3,150	1,575	20,000 hrs.
SYD-50T-SM	FT50W/2G11/RS	4,000	2,000	14,000 hrs.
SYD-55T-SM	FT55W/2G11	4,800	2,688	12,000 hrs.
SYD-80T-SM	FT80W/2G11	6,000	3,000	12,000 hrs.

This product is protected by
U.S. Patent 6,702,453

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

