



## DISPLAY

520


### INTEGRAL T-RAIL

T2, T5, T8, HALOGEN, XENON


- extruded aluminum construction
- available in linear fluorescent or low-voltage incandescent lamps
- low-voltage lamps may be spaced 12", 9" or 6" on center
- two types of housing for remote ballast/transformer
- fixtures are built to order with lengths to the nearest 1/16"
- standard anodized finishes are listed. custom anodized and powdercoated finishes available
- all Display fixtures come standard with 9'-0" wire leads
- two types of wire feed offered  
**End Feed** includes 6'-0" of 3/8" flexible conduit  
**Front Feed** includes a matching 32" long 1/2" o.d. rigid downtube and 3'-0" of 3/8" flexible conduit
- optional mounting clips, end caps and lamp sleeves
- UL and C-UL Listed for Dry and Damp Locations

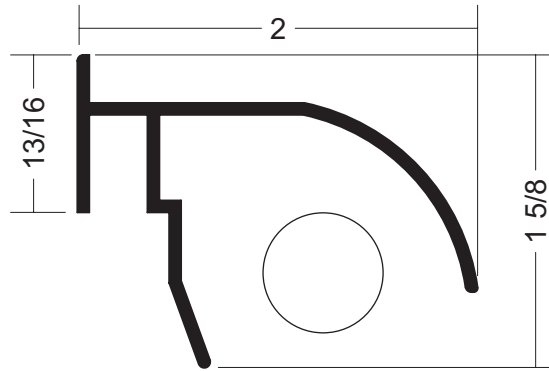


Flush-Mount / Wood-End  
Mounting Clip  
option: **MC01**



Smooth Finish  
Matching Solid End Cap  
option: **EC520**

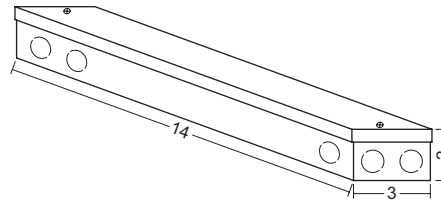

Remote Power Box  
**BB14B**  
concealed mount

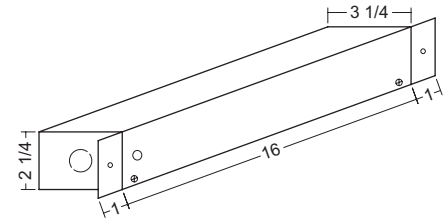

Remote Power Box  
**BB16A**  
flush mount

520

Reflector  
Shape

Lamp Type

T2  
T5  
T5HO  
T8

H10 - 10 watt halogen  
H20 - 20 watt halogen  
X10 - 10 watt xenon  
X20 - 20 watt xenon  
*when specifying halogen  
or xenon, add 12, 9 or 6  
for lamp on-center spacing*

Remote Power Box  
BB14B  
BB16A

Voltage

120  
277  
347

Length

specify required  
length to the  
nearest 1/16"

Finish

SC - Satin Clear  
BC - Bright Clear  
FB - Flat Black  
BB - Bright Black  
SG - Satin Gold  
BG - Bright Gold  
CU - Custom  
(please specify)

Options

Feed Type

EFR - End Feed Right  
EFL - End Feed Left  
FFR - Front Feed Right  
FFL - Front Feed Left  
CU - custom (supply sketch)  
"Right" is shown above

#### Job Information

Type

Job Name

Location

# BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

