


DISPLAY

530


ANGLED

T2, T5, T8, HALOGEN, XENON


- extruded aluminum construction
- available in linear fluorescent or low-voltage incandescent lamps
- low-voltage lamps may be spaced 12", 9" or 6" on center
- two types of housing for remote ballast/transformer
- fixtures are built to order with lengths to the nearest 1/16"
- standard anodized finishes are listed. custom anodized and powdercoated finishes available
- all Display fixtures come standard with 9'-0" wire leads
- two types of wire feed offered
End Feed includes 6'-0" of 3/8" flexible conduit
Front Feed includes a matching 32" long 1/2" o.d. rigid downtube and 3'-0" of 3/8" flexible conduit
- optional mounting clips, end caps and lamp sleeves
- UL and C-UL Listed for Dry and Damp Locations

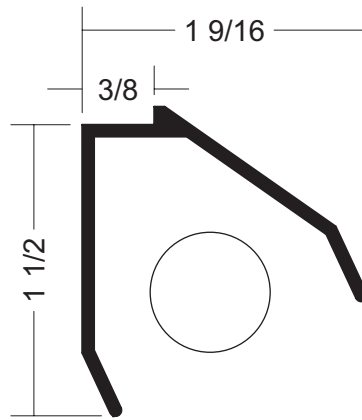

Smooth Finish
Matching Solid End Cap
option: **EC530**

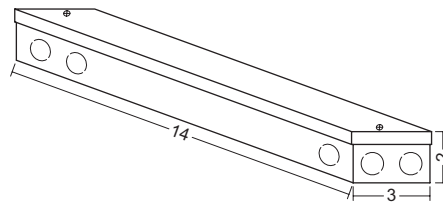

Remote Power Box
BB14B
concealed mount

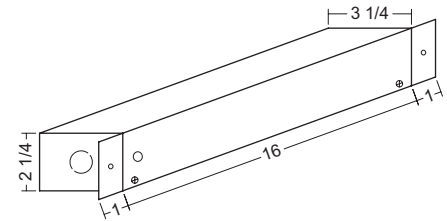

Remote Power Box
BB16A
flush mount

Job Information

Type

Job Name

Location

530		Reflector Shape	Lamp Type	Remote Power Box	Voltage	Length	Finish	Options
			T2 T5 T5HO T8	BB14B BB16A	120 277 347	specify required length to the nearest 1/16"	SC - Satin Clear FB - Flat Black CU - Custom (please specify)	Feed Type EFR - End Feed Right EFL - End Feed Left FFR - Front Feed Right FFL - Front Feed Left CU - custom (supply sketch) "Right" is shown above
			H10 - 10 watt halogen H20 - 20 watt halogen X10 - 10 watt xenon X20 - 20 watt xenon <i>when specifying halogen or xenon, add 12, 9 or 6 for lamp on-center spacing</i>					

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

