
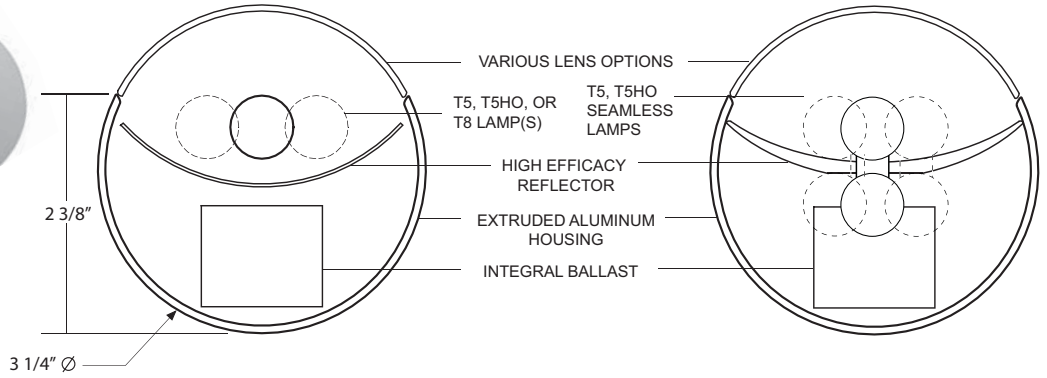


hailey - 325

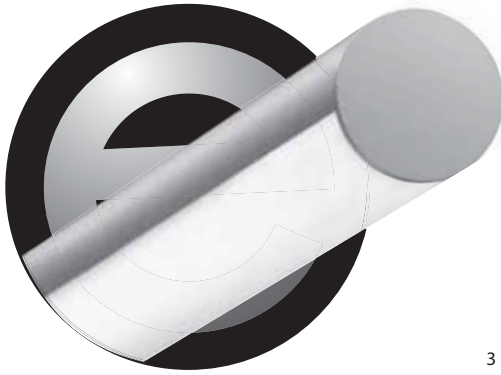


3.25" ROUND FIXTURE

MULTIPLE FIXTURE MOUNTING OPTIONS


DIRECT, INDIRECT, WALL WASH, ROTATIONAL STACK LIGHTING

- 3-1/4" diameter extruded aluminum housing
- 1/4" thick precision machined aluminum end caps
- high efficacy engineered reflector
- 85% fixture efficacy (no lens)
- rotating arm bracket, cable suspended, rotating cable suspended, stack mounting options
- 361° rotation with positive stop on rotating versions
- variety of lensing options
- satin anodized clear finish is standard - a variety of other standard and custom finishes are available
- T5, T5HO, and T8 standard linear fluorescent lamp types and T5 and T5HO seamless fluorescent lamps
- integral electronic ballasts are standard. consult Options p5 for available types of dimming and emergency ballasts
- UL and C-UL listed for Dry and Damp locations

MOUNTING OPTIONS

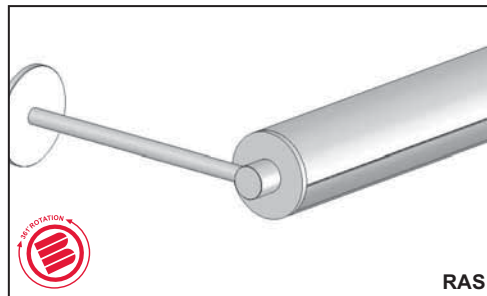


ROTATING ARM SYSTEM
RAS

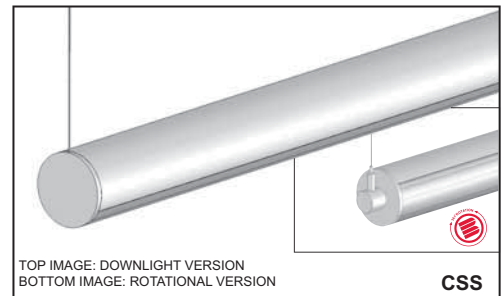

TOP IMAGE: DOWNLIGHT VERSION
BOTTOM IMAGE: ROTATIONAL VERSION


CABLE SUSPENSION SYSTEM
CSS

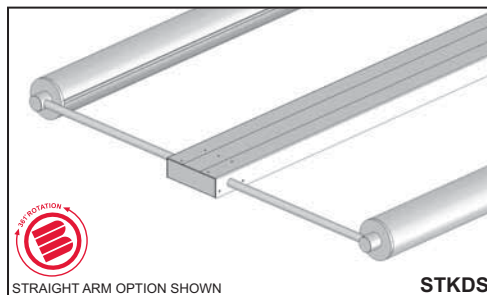

STRAIGHT ARM OPTION SHOWN

STKDS

STACK DOUBLE SIDED

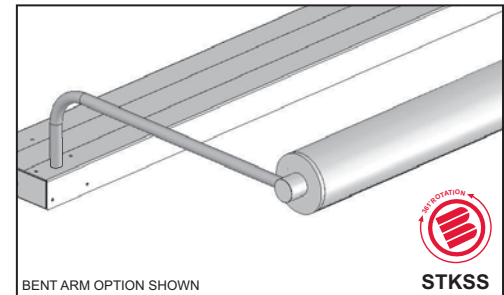

BENT ARM OPTION SHOWN

STKSS

STACK SINGLE SIDED

Series	Model	Mounting*	Lamp Qty.	Standard Lamp	Nominal Length	Voltage	Ballast	Finish	Options*
Hailey - HAI	325	RAS - Rotating Arm System CSS - Cable Suspension System STKSS - Single Sided Stack System STKDS - Double Sided Stack System SM - Surface mount	1 2	T5 T5HO T8 Seamless Lamp SMLS-T5 SMLS-T5HO	2 - 2' 3 - 3' 4 - 4' 5 - 5' 6 - 6' 8 - 8' CU - Custom*	1 - 120V 2 - 277V 3 - 347V	EB - electronic DIM__ - dimming* EM__ - emergency* *Refer to the "Options" section for DIM__ and EM__ option codes	SC - Satin Clear BC - Bright Clear FB - Flat Black CU - Custom* *Consult Factory	NL - No Lens SIC - Satin Ice Clear SIW - Satin Ice White LP - Linear Prismatic** CU - Custom* *Consult Factory **Non-stocked item - longer lead time

*ALL mounting options require further specification - See following pages

*Consult Factory
**Specify length in nominal feet

Job Information

Type:

Job Name:

Location:

0309

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

