


hailey - 125

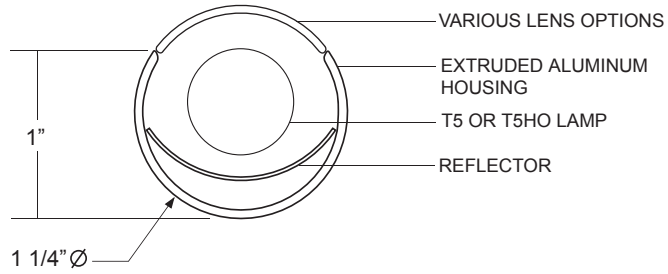


MOUNTING OPTIONS

1.25" ROUND FIXTURE

MULTIPLE FIXTURE MOUNTING OPTIONS


DIRECT, INDIRECT, WALL WASH, ROTATIONAL STACK LIGHTING

- 1-1/4" diameter extruded aluminum housing
- 1/4" thick precision machined aluminum end caps
- rotating arm system, cable suspended, rotating cable suspended, and stack mounting options
- 361° rotation with positive stop on rotating versions
- variety of lensing options
- satin anodized clear finish is standard - a variety of other standard and custom finishes are available
- T5 and T5HO linear fluorescent lamp types
- remote electronic ballasts are standard, consult "Options" section for available types of dimming and emergency ballasts
- UL and C-UL listed for Dry and Damp locations

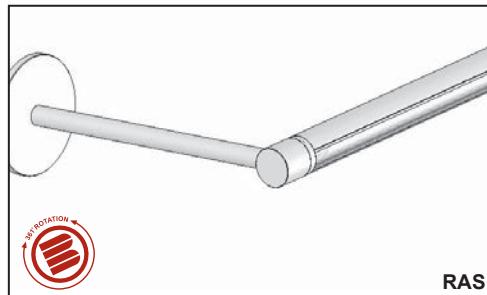


RAS

ROTATING ARM SYSTEM

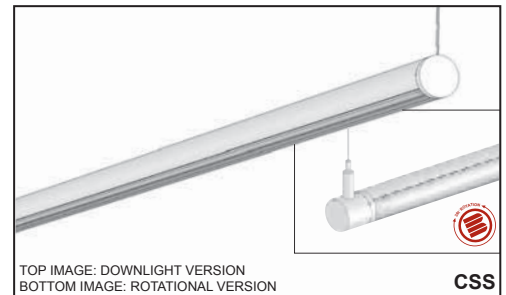


TOP IMAGE: DOWNLIGHT VERSION
BOTTOM IMAGE: ROTATIONAL VERSION

CABLE SUSPENSION SYSTEM

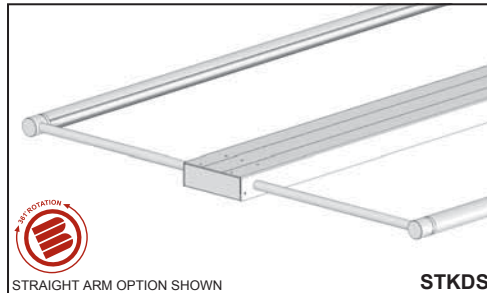

STKDS

STACK DOUBLE SIDED

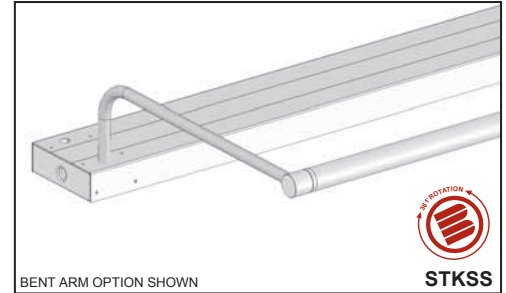

STKSS

STACK SINGLE SIDE

HAI 125

Series
HAI - Hailey

Model
125

Mounting*
RAS - Rotating Arm System
CSS - Cable Suspension System
STKSS - Single Sided Stack System
STKDS - Double Sided Stack System
-

Lamp
T5
T5HO

Nominal Length
2 - 2'
3 - 3'
4 - 4'
5 - 5'
CU - Custom*

*Consult Factory
**Specify length in nominal feet

Voltage
1 - 120V
2 - 277V
3 - 347V

Ballast
EB - electronic
DIM__ - dimming*
EM__ - emergency*

*Refer to the "Options" section for DIM__ and EM__ option codes

Finish
SC - Satin Clear
BC - Bright Clear
FB - Flat Black
CU - Custom*

*Consult Factory

Options*

*Specify or consult factory

Lens
NL - No Lens
SIC - Satin Ice Clear
SIW - Satin Ice White
LP - Linear Prismatic**
CU - Custom*

*Consult Factory
**Non-stocked item - longer lead time

*ALL mounting options require further specification - See following pages

Job Information

Type: _____

Job Name: _____

Location: _____

0309

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.



HAI - p1