


kelsey - 125

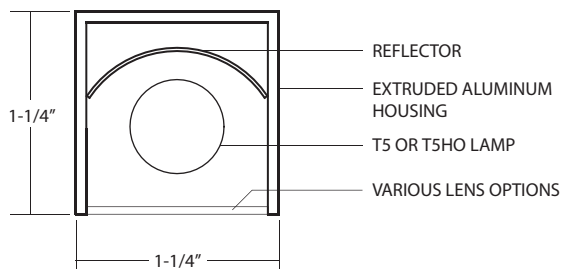





1.25" SQUARE FIXTURE

MULTIPLE FIXTURE MOUNTING OPTIONS

DIRECT, INDIRECT, WALL WASH, ROTATIONAL STACK LIGHTING

- 1-1/4" square extruded aluminum housing
- 1/4" thick precision machined aluminum end caps
- rotating arm system, cable suspended, rotating cable suspended, and stack mounting options
- 361° rotation with positive stop on rotating versions
- variety of lensing options
- satin anodized clear finish is standard - a variety of other standard and custom finishes are available
- T5 and T5HO linear fluorescent lamp types
- remote electronic ballasts are standard. consult Options p5 for available types of dimming and emergency ballasts
- UL and C-UL listed for Dry and Damp locations

MOUNTING OPTIONS

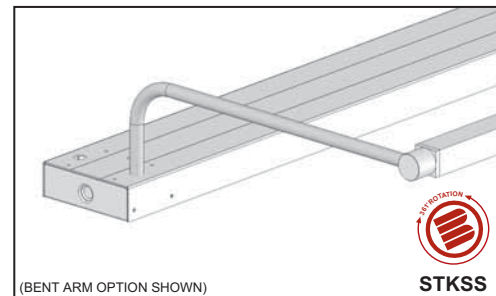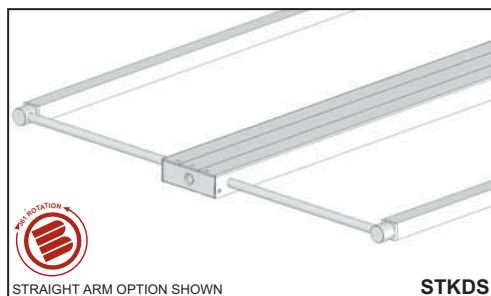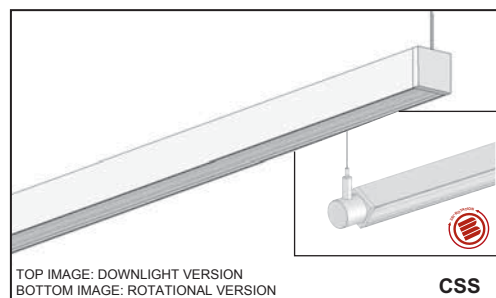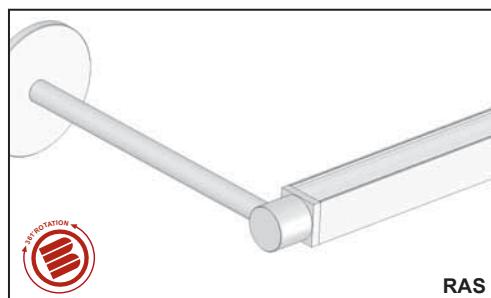

KEL 125

Series
KEL - Kelsey

Model
125

Mounting*
RAS - Rotating Arm System
CSS - Cable Suspension System
STKSS - Single Sided Stack System
STKDS - Double Sided Stack System
SM - (surface mount)

Lamp
T5
T5HO

Nominal Length
2 - 2'
3 - 3'
4 - 4'
5 - 5'

Voltage
1 - 120V
2 - 277V
3 - 347V

Ballast

EB - electronic
DIM__ - dimming*
EM__ - emergency*

*Refer to Options p5 for DIM__ and EM__ option codes

Finish

SC - Satin Clear
BC - Bright Clear
FB - Flat Black
CU - Custom*

*Consult Factory

Options*

*Specify or consult factory

Lens

NL - No Lens
SIC - Satin Ice Clear
SIW - Satin Ice White
LP - Linear Prismatic**
CU - Custom*

*Consult Factory
**Non-stocked item - longer lead time

*ALL mounting options require further specification - See following pages

Job Information

Type:

Job Name:

Location:

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.



KEL p 125