




CSS OPTIONS

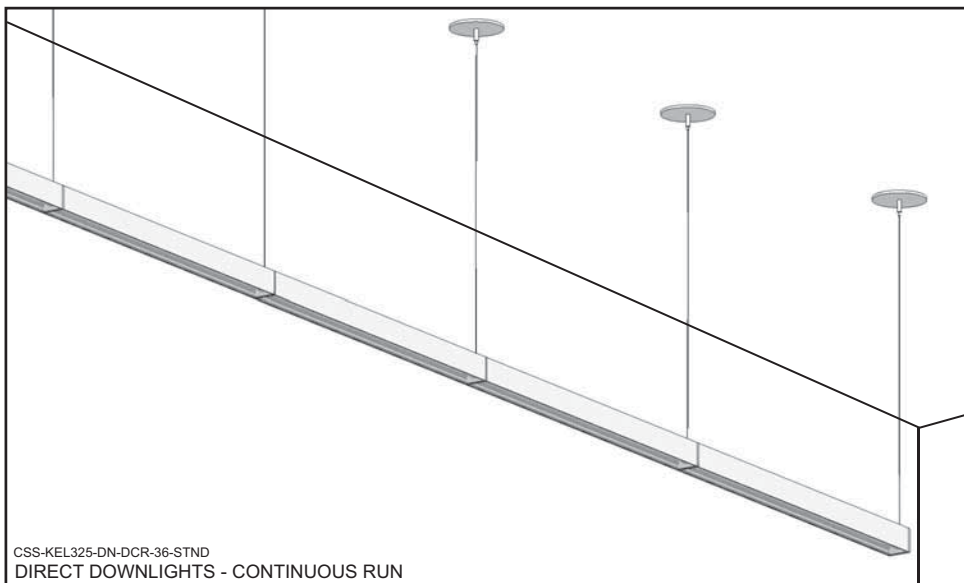


CSS-KEL325-DN-DCR-36-STND
DIRECT DOWNLIGHTS - CONTINUOUS RUN

CSS


CABLE SUSPENSION SYSTEM

DIRECT, INDIRECT, WALL WASH, ROTATIONAL


- 1/4" thick precision machined aluminum end caps
- rotational - wall wash - version rotates 36° with positive stop
- standard canopy mounting options - custom shapes, sizes and finishes available - consult factory
- can be installed without a canopy
- standard 1/16" diameter stainless steel cable. Consult factory for other cable diameters
- cables come in standard lengths and are field adjustable - consult factory for other options
- power cords available in white, black, gray, and braided - consult factory for other options
- add "CSS" under "Mounting" section

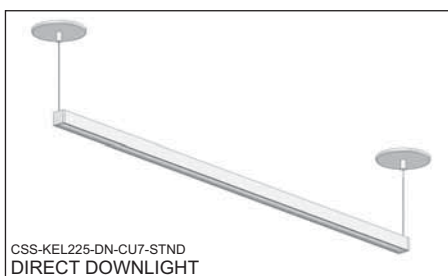


CSS-KEL225-DN-CU7-STND
DIRECT DOWNLIGHT

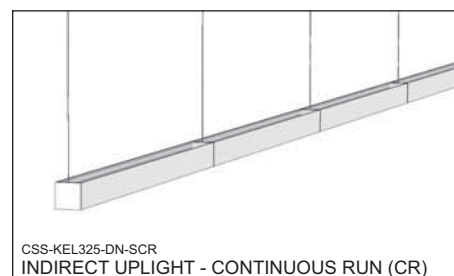

CSS-KEL325-DN-SCR
INDIRECT UPLIGHT - CONTINUOUS RUN (CR)

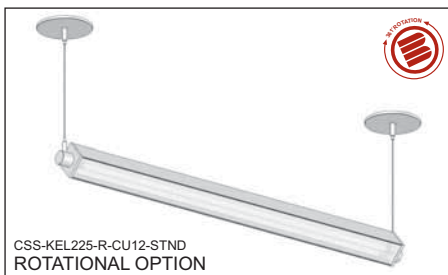

CSS-KEL225-R-CU12-STND
ROTATIONAL OPTION

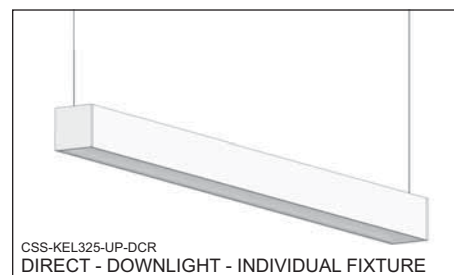

CSS-KEL325-UP-DCR
DIRECT - DOWNLIGHT - INDIVIDUAL FIXTURE

CSS

Mounting
CSS - Cable Suspended System

Fixture
KEL125 - 1.25" Size fixture
KEL225 - 2.25" Size fixture
KEL 325 - 3.25" Size fixture

Orientation
UP - Uplight
DN - Downlight
R - Rotational

Continuous Run Option**
SCR - Seamless Continuous Run
DCR - Disc Continuous Run
RCR - Rotational Continuous Run

**For individual fixtures, leave blank

Cable Length
36 - 36"
72 - 72"
96 - 96"
CU - Custom* (Specify length in inches - ie: CU148)

Mounting Options
STND - Bracket bar w/5" round Canopy
NC - No Canopy - 1/4-20 Side Exit Cable Gripper - (1/4-20 stud provided by others)
CU - Custom*

Canopy Finish (Powder Coat)
MW - Matte White
HRW - High Reflectance White
SL - Silver
FB - Flat Black
CU - Custom*

Power Cord Color
W - White
B - Black
G - Gray
SC - Braided Cable
CU - Custom*

End Cap / Disc / Arm / Knuckle: Anodized Finish
MF - Match Fixture
SC - Satin Clear
BC - Bright Clear
FB - Flat Black
RM - Raw Machined
CU - Custom*

*Consult factory for all Custom (CU) options

Job Information

Type: _____

Job Name: _____

Location: _____

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

