560 LED DISPLAY

LOW PROFILE

SHOWCASE / DISPLAY

RB - REMOTE BALLAST

- light engines avaliable:

  -HF2N High Lumen LED emitters

  -HF2N-H Half populated

  -HF2XB-S4
  high lumen LED emitters
- extruded aluminum housing -excellent heat sinking - extends lamp life - improves efficiency
- all 560-RB fixtures come standard with 9'-0" wire leads
- variety of lensing options
- satin anodized clear finish is standard - a variety of other standard and custom finishes and powdercoated finishes are available
- remote driver
- mounting options, end caps, and acrylic diffusers also available
- UL and C-UL listed for dry and damp locations

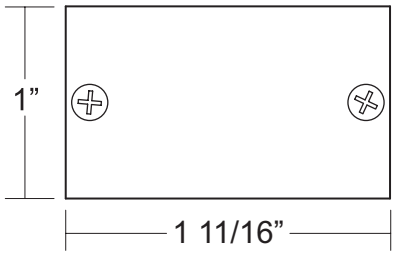

560-LED dimentions

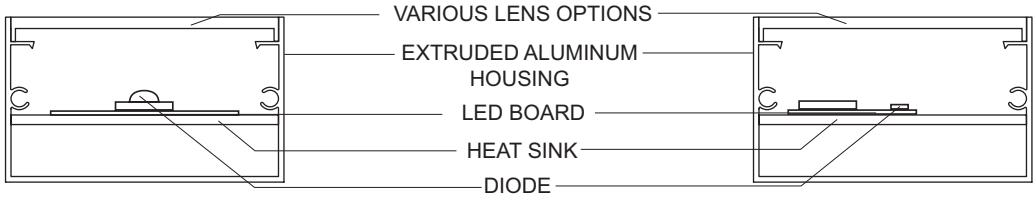

-HF2XB-S4
(11.5" board)

-HF2N
-HF2N-H
(10" & 4" boards)



Mounting Clip
option: **MC04**



Mounting Clip
option: **MC03**

560-LED [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]

560-LED

LED Options:
-HF2N (10w/ ft)
-HF2N-H (5w/ ft)
-HF2XB-S4 (3.9w/ ft)

Color Temp
-3000
-3500
-4000

Nominal Length
1 - 1'
2 - 2'
3 - 3'
4 - 4'
5 - 5'
CU - Custom*
CR__** - Continuous Run*

*Consult Factory
**Specify length in nominal feet

Voltage
1 - 120V
2 - 277V

Lens
NL - No Lens
SIC - Satin Ice Clear
SIW - Satin Ice White
LP - Linear Prismatic**
CU - Custom*

*Consult Factory
**Non-stocked item - longer lead time

Mounting
-MC03
-MC04
-Custom*

Feed Type
EF- End Feed
BF - Backt Feed
CU - custom (supply sketch)

Finish
SC - Satin Clear
BC - Bright Clear
FB - Flat Black
CU - Custom*

*Consult Factory

Options*
*Specify or consult factory

Job Information

Type:

Job Name:

Location:

0110

BIRCHWOOD LIGHTING
714.550.7118 ◆ fax 714.550.7151 ◆ www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.