

# BALLAST BOXES

## REMOTE HOUSINGS

### POWER SUPPLIES

- used for remote power supplies
- formed aluminum construction
- standard finish is mill aluminum to provide excellent heat dissipation
- custom powder coat finishes are available
- standard sizes shown, custom sizes are available
- all models feature several conveniently located trade size knock-outs (K.O.'s)
- fluorescent power supplies have UL Class 2 output
- consult factory for recommended maximum remote mounting distance
- UL and C-UL Listed for Dry Locations


### SPECIFICATION

Ballast box	Box Finish
BB11D - 11"	MA - Mill Aluminum
BB14B - 14"	MW - Matte White
BB18B - 18"	HRW - High Reflectance White
BB23B - 23"	SL - Silver
BB04C - 4" x 4"	FB - Flat Black
CUBB_ - Custom*	CU - Custom*


Specify Dimensions

\*Consult factory for all custom options


- BB11D**  
L = 11" x 1 7/8" x 1 5/16"
- surface mount in any orientation
- for use with 120v only - 20W & 50W
- standard ballast housing

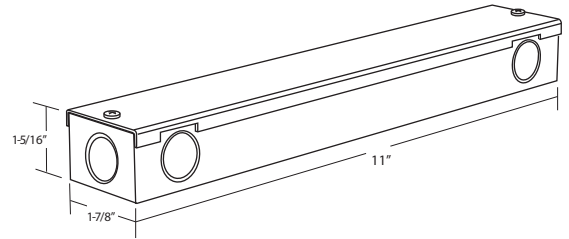

- BB14B**  
L = 14"
- BB18B**  
L = 18"
- BB23B**  
L = 23"
- surface mount in any orientation
- most dimming options
- EM option - tandem/ side by side version

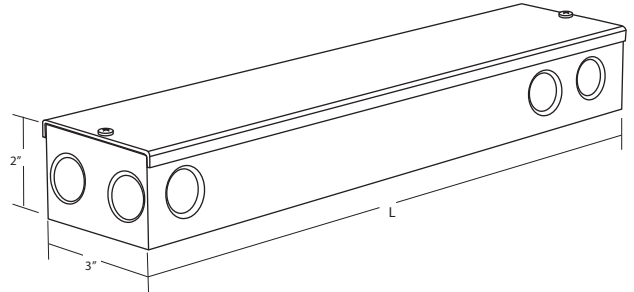


- BB16A**  
L = 16"
- panel cutout: 2 1/4" X 16 1/16"
- recess/panel mount
- includes on-off push button switch
- optional convenience receptacle

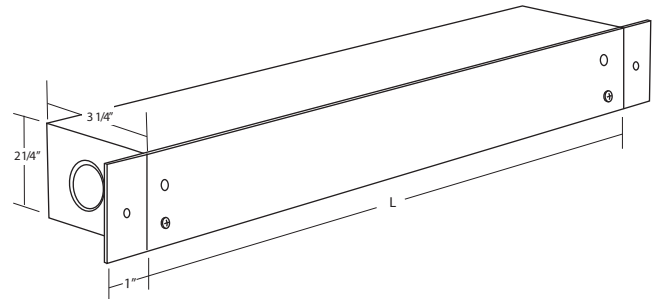

- BB09A**  
L = 9"
- panel cutout: 2 1/4" X 9 1/16"

- BB04C**  
4" x 4" x 2 3/16"
- see instructions next page

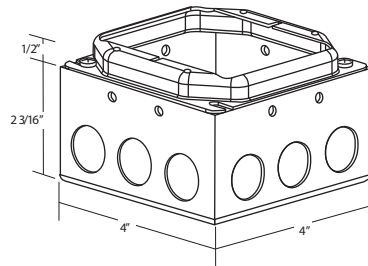

NOTE: Certain ballast options will require a minimum Ballast Housing size - The standard Ballast Housing is: **BB11D** in a mill aluminum (**MA**) finish.

### Job Information

Type: \_\_\_\_\_

Job Name: \_\_\_\_\_

Location: \_\_\_\_\_

## BIRCHWOOD LIGHTING

714.550.7118 ♦ fax 714.550.7151 ♦ www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

