WP SYSTEM

WP-T5-US
WP-T5HO-US

UNDER SHELF

T5 or T5HO LINEAR LAMP

- 20 gauge steel construction, also available in aluminum, add "**AL**" in "Options" space
- uses standard or high output T5 fluorescent lamps, other lamp types available
- see model WP-T5-US-AC for formed snap-on acrylic cover
- standard ballasts are integral electronic, consult Options p5 for available types of dimming and emergency ballasts
- fixtures are available in nominal lengths of 1, 2, 3, 4, 5 and 8 feet, see part numbers to the right for actual fixture lengths
- standard finish is High Reflectivity White powder coat done post production, decorative Large Pattern Galvanize and other custom colors and finishes are also available
  all WP System fixtures are treated with a multi-stage phosphate process which ensures proper finish bonding and inhibits rust
- available with optional white on-off rocker switch
- UL and C-UL Listed for Dry and Damp Locations

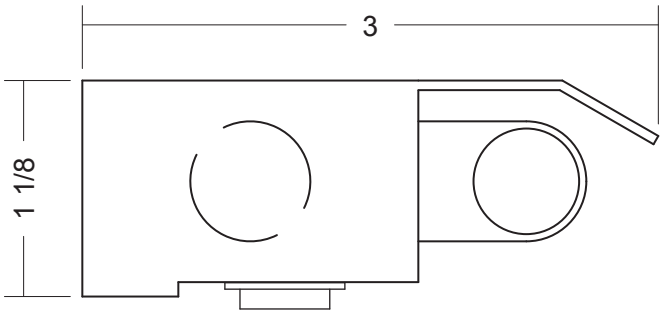

On/Off
rocker switch
option: **RS1**

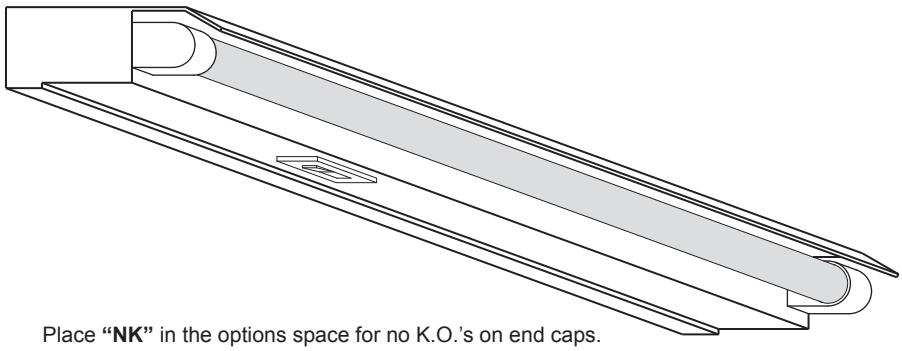

Place **"NK"** in the options space for no K.O.'s on end caps.

WP [ ] **US** [ ] [ ] [ ] [ ] [ ]

Family
WP

Lamp Type
T5 - Standard T5
T5HO - T5 High Output

Model
US - Under Shelf

Voltage
120
277
347

Ballast
EB - electronic
EM__ - emergency*
*refer to Options p5 for **DIM__** and **EM__** options code

Length

T5	T5HO
108 - 12 3/16"	
114 - 22 1/2"	**124** - 22 1/2"
121 - 34 5/16"	**139** - 34 5/16"
128 - 46 1/8"	**154** - 46 1/8"
135 - 57 7/8"	**180** - 57 7/8"
228 - 92 1/16"*	**254** - 92 1/16"*

*(*4' lamps end-to-end)*

Finish
HRW - High Reflectivity White
LPG - Large Pattern Galvanize
CU - Custom (please specify)

Options
NK - mark for no K.O. on end caps

Job Information

Type

Job Name

Location

BIRCHWOOD LIGHTING
714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.