


WP SYSTEM

WP-T8-S

STANDARD

T8 LINEAR LAMP

- 20 gauge steel construction, also available in aluminum, add "AL" in "Options" space
- uses standard T8 linear fluorescent lamps, other lamp types available
- standard ballasts are integral electronic, consult Options p5 for available types of dimming and emergency ballasts
- long runs are tandem wired with the master-satellite configuration unless otherwise specified
- fixtures are available in nominal lengths of 1, 2, 3, 4, 5 and 8 feet, see part numbers to the right for actual fixture lengths
- standard finish is High Reflectivity White powder coat done post production, decorative Large Pattern Galvanize and other custom colors and finishes are also available
all WP System fixtures are treated with a multi-stage phosphate process which ensures proper finish bonding and inhibits rust
- optional standard (shown) and custom shape solid, slotted or perforated reflectors available
- UL and C-UL Listed for Dry and Damp Locations

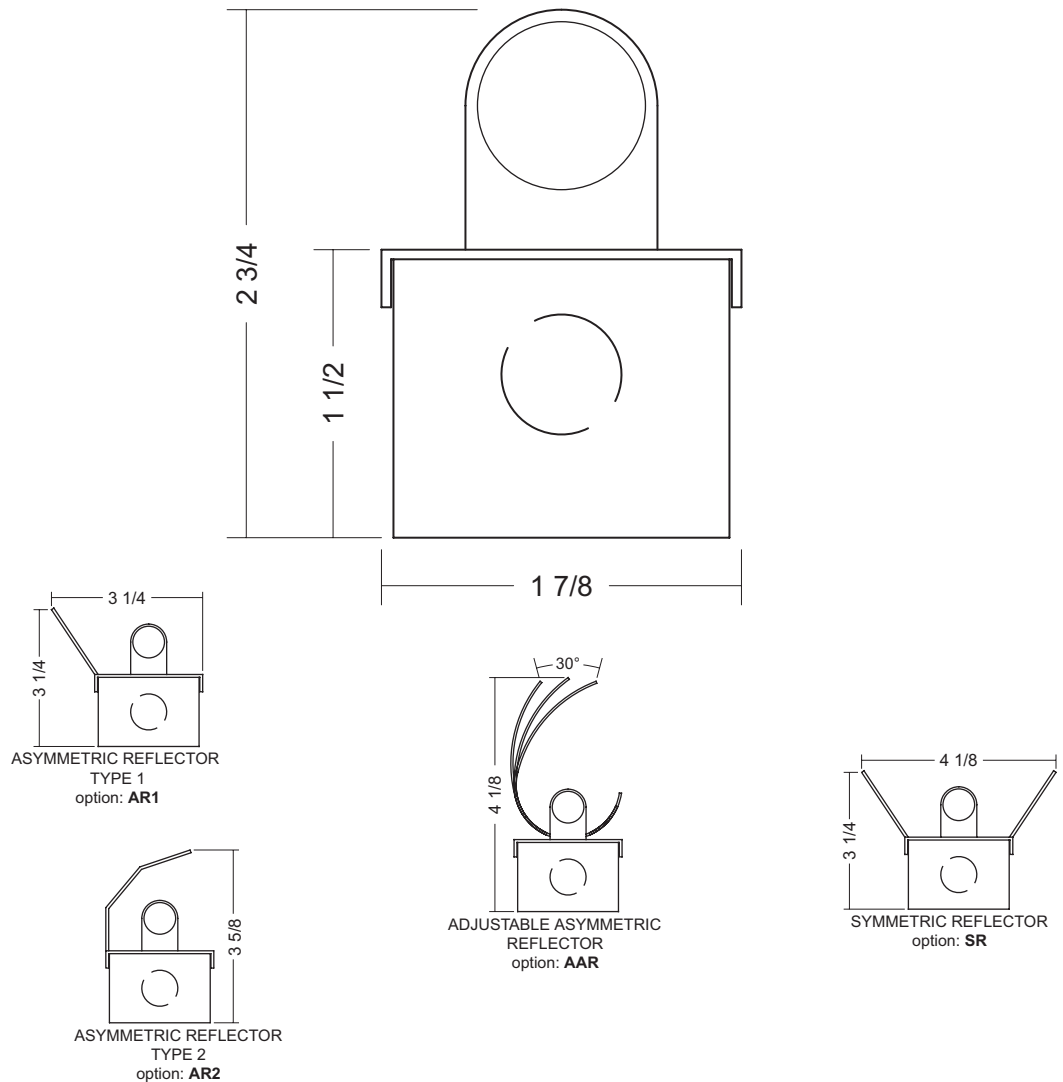

Job Information

Type _____

Job Name _____

Location _____

WP	T8	S	Voltage	Length	Options
Family WP	Lamp Type T8 - Linear T8	Model S - Standard	120 277 347	113 - 12" 117 - 24" 125 - 36" 132 - 48" 140 - 60" 232 - 96" (4' lamps end-to-end)	Ballast EB - electronic DIM__ - dimming* EM__ - emergency* *refer to Options p5 for DIM__ and EM__ options code
				Finish HRW - High Reflectivity White LPG - Large Pattern Galvanize CU - Custom (please specify)	

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

