





DISPLAY

560-RB


SHOWCASE / DISPLAY

T2, T5, T8 REMOTE BALLAST


- extruded aluminum construction
- available T2, T5, T5HO and T8 linear fluorescent lamp versions, low-voltage incandescent lamp version available (see 560-LV)
- two types of housing for remote ballast/transformer
- standard anodized finishes are listed, custom anodized and powdercoated finishes available
- all 560-RB fixtures come standard with 9'-0" wire leads
- optional mounting clips and lamp sleeves
- UL and C-UL Listed for Dry and Damp Locations

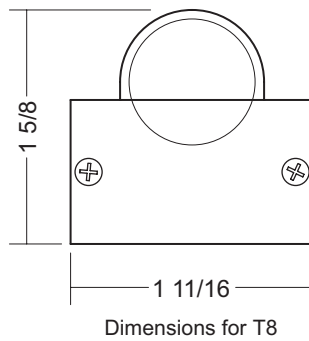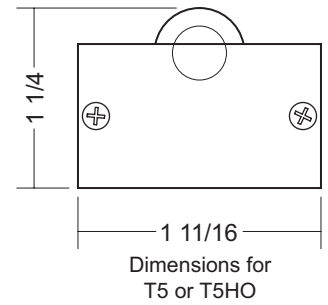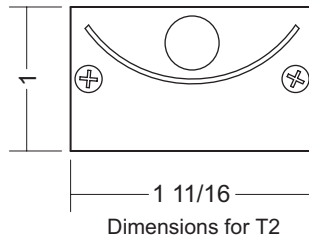

ACTUAL FIXTURE LENGTHS							
T8		T5		T5HO		T2	
113	14"	108	14"	-	-	106	11"
117	26"	114	24 7/16"	124	24 7/16"	108	15"
125	38"	121	36 1/4"	139	36 1/4"	111	19"
132	50"	128	48 1/16"	154	48 1/16"	113	23"
140	62"	135	59 7/8"	180	59 7/8"	213	44"

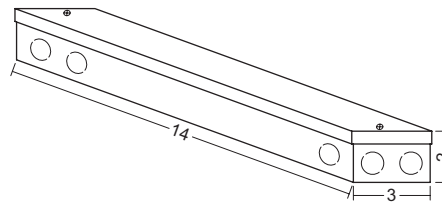


Remote Power Box
BB14B
concealed mount

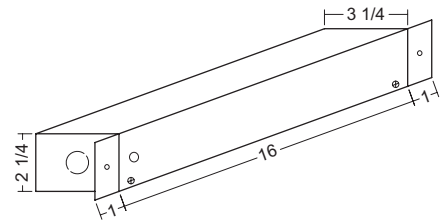

Remote Power Box
BB16A
flush mount

Job Information
Type
Job Name
Location

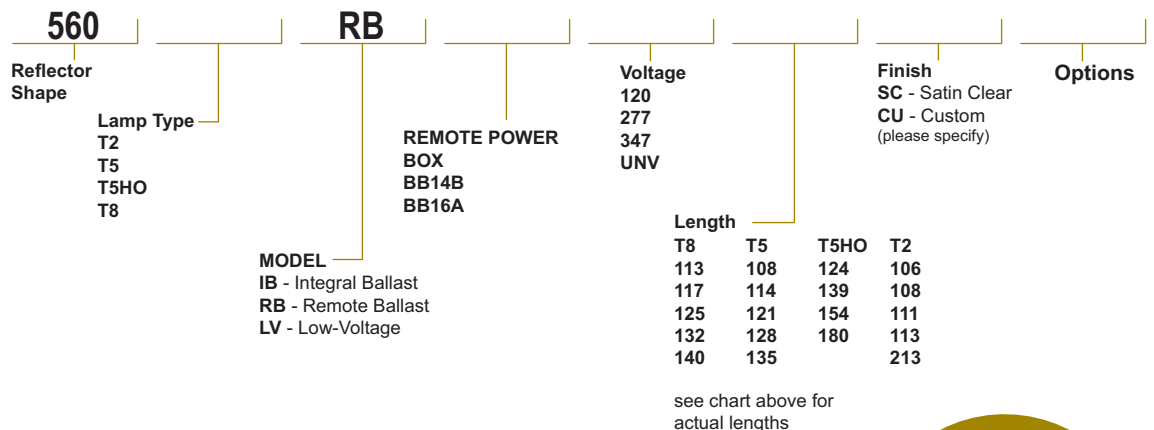

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

