
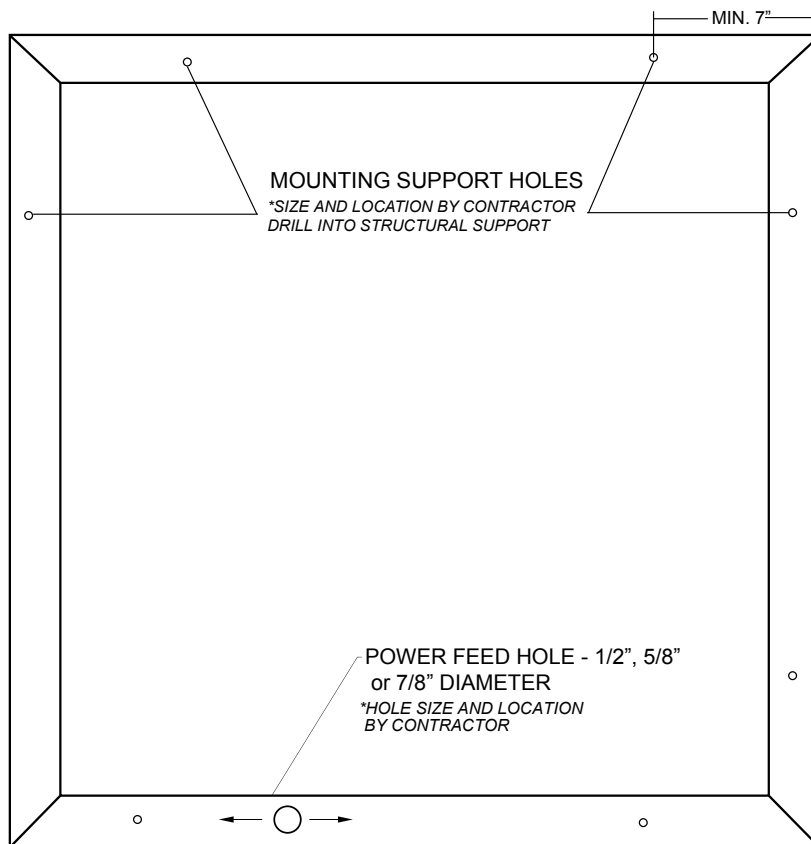


INSTRUCTION SHEET

SM - Surface Mounted

ERIKA WALL/CEILING MOUNT

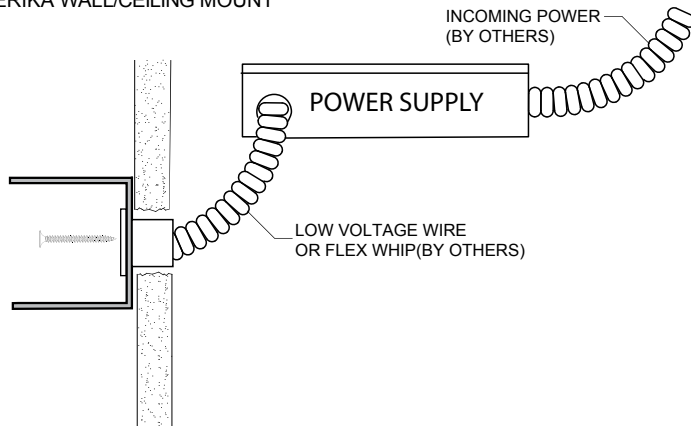

1. Install power supply box within suitable distance (Dimming requires limited distance, consult factory) Run whip with a UL approved conduit snap-in flex connector can be stubbed out of the mounting surface, provided by others.
2. Remove lens, lamp and internal liner or LED tray.
3. Determine fixture location on wall and note/mark the center of the whip on the fixture.
4. Drill appropriate size hole for wire feed through fixture - DO NOT DRILL LINER BRACKETS
5. Drill mounting support holes 7" in from corner - support method to be determined/ provided by contractor.
6. Complete wire make-up.
7. Securely mount fixture to surface.
8. Reinstall lamp and internal liner or LED tray
9. Install lens.

Continuous Run Info

1. Install starter fixture, following 1-6 above.
2. Remove lens and liner of adjacent fixture
3. Slide open end of fixture (side without a cable setup) into starter fixture's continuous run joiner plate and alignment guide pins.
4. Secure with supplied counter sink screws on joiner plate
5. Ensure fixtures are level and securely tightened to each other to avoid potential light leak between housing.
6. Continue installation for all other fixtures in the row, by repeating 2-7.
7. Replace all liners, install lamps (if fluorescent), install all lenses or louvers. Ensure all connections are secure.

Note: To be installed by a qualified electrician per N.E.C. and all local codes.

820-00075

V-0115