


COLORDIAL

JAS-RD

DMX CONTROLLER

ROTARY DIAL

- stand alone control fits standard single or multi gang electrical wall boxes (by others)
- contains 6 pre-programmed modes, plus OFF
- real time color and effects changing
- controls up to 60 unique lighting addresses, with the data repeating after the first twelve
- 1/4" D-shaft fits most standard dimmer knobs for knob interchange and customization
- memory feature recalls the last effect settings
- power input: 24VDC @ 100mA
- works with JAS-3 model only

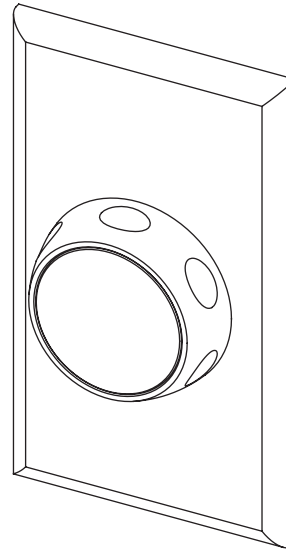

Standard Pre-Programmed Modes

FIXED COLOR

Displays a single fixed color, which may be changed by rotating the knob.

COLOR WASH

Colors smoothly transition through the visible color spectrum over the entire run of Jason fixtures. Speed of change is controlled by rotating the knob.

CHASING RAINBOW

When applied to a group of lights, colors of the rainbow appear to chase each other from one Jason fixture to next. Speed of a single pass is controlled by rotating the knob.

RANDOM COLOR

Colors step or jump from one color to the next randomly. Speed of the changes is controlled by rotating the knob.

RANDOM FADE

Colors smoothly transition from one color to the next randomly. Speed of the transitions is controlled by rotating the knob.

WHITE

Static display of white light. Intensity is controlled by rotating the knob.

Job Information

Type

Job Name

Location

JAS

Family
JAS

RD

Model
RD - Rotary Dial

BIRCHWOOD LIGHTING

714.550.7118 • fax 714.550.7151 • www.BirchwoodLighting.com

NOTE: Specifications and dimensions are subject to change without notice.

